





T 3000 UV DTF



UV DTF PRINTER SERIES

A2 CRYSTAL UV DTF PRINTER

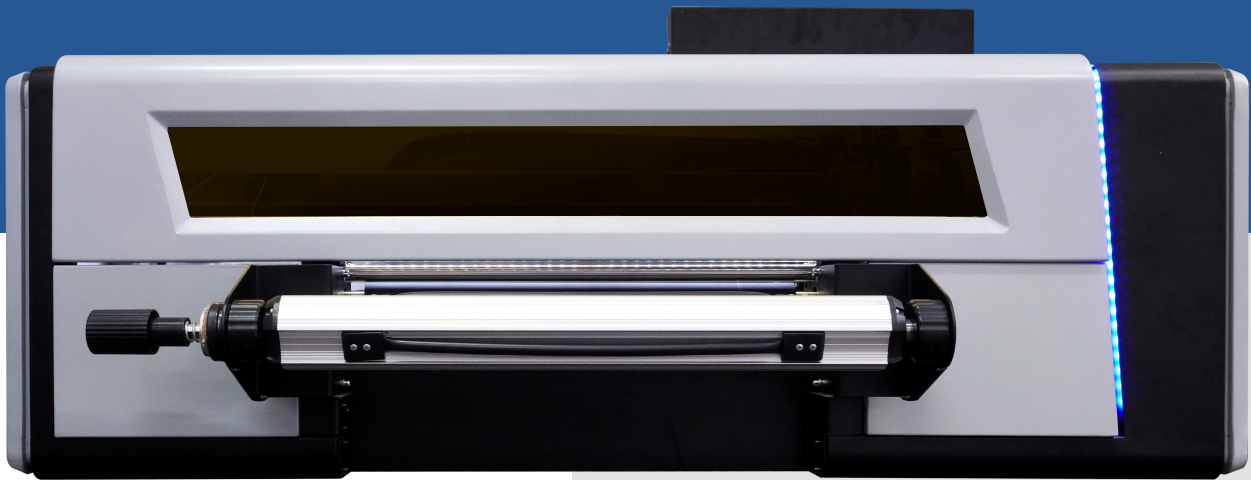

MAIN APPLICATION


Decoration Industry

Advertising Industry

Packaging Industry

Gift Industry

PRODUCT DETAILS



Adopt the world famous
brand board card



White ink stirring circulation
system, extend sprayer life




Lift ink holder



Adopt high power air-cooler
UV lamp

T 3000 UV DTF

A2 CRYSTAL UV DTF PRINTER

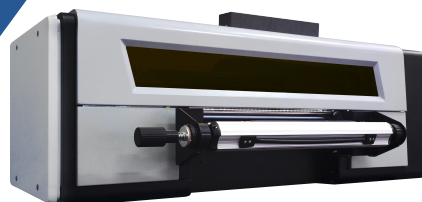

TECHNICAL SPECIFICATIONS

MODEL	T 3000
Model	A2 Crystal UV DTF Printer
Printerhead and Quantity	4 high precision sprinkler heads
Printing resolution	1440DPI
Printing speed	8PASS:3.5m ² /h
Printing width	420mm
Printing medium	Release paper, release film, AB film
Ink	UV ink capacity : 350ml
Color	CMYKLmLc+varnish+glue
RIP Software	Photoprint/Maintop 6.0
Operarting system	Windows 7 or above
Picture format	Tiff, Jpeg, Bitmap, Eps, Pdf, PNG
Operation enviroment	The temperature is 25°C-30°C, and the humidity is 50%-75%
Power	220V, 50-60HZ, 350W, power 700W, current 3.5A
Interface	Gigabit network card
Mechine size	1350*500*580mm (length x width x height)
Packaging size	1700*810*840mm (lenght x width x height)
Gross weight	100KG
Net weight	142KG

Technical specifications are subject to change without prior notice.

