




# Hapond H-5204

## HYBRID



UV INKJET SERIES

## INSPIRING INNOVATION

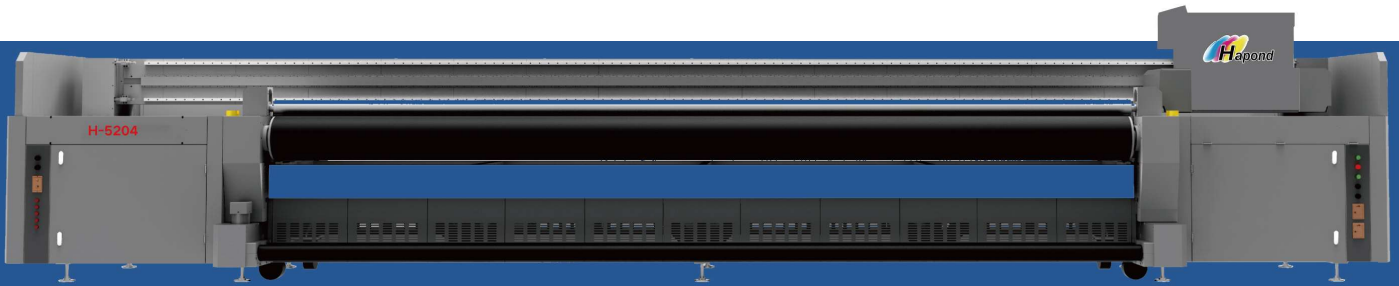

### MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry

Packaging Industry

Exhibition Industry

Leather & Textile Industry

Anti friction  
Rubber Roller



Superior quality  
UV LED System



High quality  
Cable Chain



JAPAN  
KONICA Print Head



UV INKJET SERIES

 **Hapond H-5204 Hybrid**

# Hapond H-5204 Hybrid

## UV INKJET SERIES



### TECHNICAL SPECIFICATIONS

Dimension 机器尺寸	8600mm(L/长) x 2100mm(W/宽) x 1750mm(H/高)		
Weight 机器重量	5000kg /公斤		
Max. Print Width 打印宽度	5200mm /毫米		
Max. Media Width 材料宽度	5200mm /毫米		
Ink Type 墨水类型	UV Curable Ink /uv固化墨水		
Ink Color 墨水颜色	C M Y K Optional: W		
Print Head 打印喷头	KONICA 1024i (6pl/13pl), Optional: KONICA 1024A		
No. of Print Head 喷头数量	4 - 20 units		
Print Resolution 打印精度	480x1080dpi, 480x1440dpi, 540x1080dpi, 540x1440dpi		
Printing Speed 印刷速度	Sketch Mode /草图模式	92 m <sup>2</sup> /hr	16 Print Head 185 m <sup>2</sup> /hr
	Production Mode /生产模式	75 m <sup>2</sup> /hr	150 m <sup>2</sup> /hr
	Quality Mode /品质模式	52 m <sup>2</sup> /hr	105 m <sup>2</sup> /hr
	High Precision Mode /高精度模式	32 m <sup>2</sup> /hr	65 m <sup>2</sup> /hr
Print Mode 打印模式	Uni- and Bi- Direction /单向和双向		
Media Type 适用材料种类	Acrylic, Aluminium, Ceramic Tiles, Corrugated Board, Foam Board, Glass, Metal Plate, Back-lit, Banner Flex, Canvas, Mesh Paper, Synthetic Paper, Reflective Film, Sticker, Tarpaulin, Textile, Non-woven, Wallcoverings, etc. /亚克力, 铝材, 瓷砖, 瓦楞板, 泡沫板, 玻璃, 金属板, 背光, 灯箱布, 油画布, 网格纸, 合成纸, 单透贴, 贴纸, 篷布, 纺织品, 无纺布, 壁纸等		
Software 软件输出	Hapond Printer Manager, Print Factory, Optional: Caldera		
Curing System 固化系统	LED UV System		
Cleaning System 清洗系统	Positive Purge each Color /单色正压清洗		
Negative pressure system 负压系统	Independent Research And Development Of A Complete Set Of Negative Pressure System 自主研发全套负压系统		
Image Format 打印文件格式	BMP, TIFF, JPEG, EPS, PDF, etc.		
Color Management 颜色控制	ICC Profile /ICC色彩特性文件		
Data Interface 数据传输	USB 2.0/3.0		
Input Voltage 输入电压	Single Phase, AC220V ±10% (50/60Hz) /单相220V ±10% (交流50/60赫兹)		
Working Environment 工作环境	Temperature /温度 : 20°C-28°C Humidity /湿度 : 40%-70%RH		

Technical specifications are subject to change without prior notice.



HAPOND DIGITAL TECHNOLOGY SDN. BHD. (788546-V)

