



Hapond CP-3200

UV INKJET SERIES

INSPIRING INNOVATION



HIGH-QUALITY PRINTS IN MATTE OR GLOSSY FINISHES

MAIN APPLICATION

Decoration Industry


Advertising Industry

Interior Design Industry


Packaging Industry

Exhibition Industry


Leather & Textile Industry

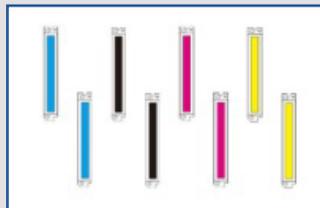

FOUR COLOR IN TWO ROWS

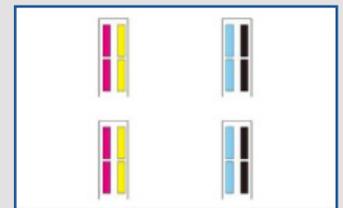

FOUR COLOR IN TWO ROWS

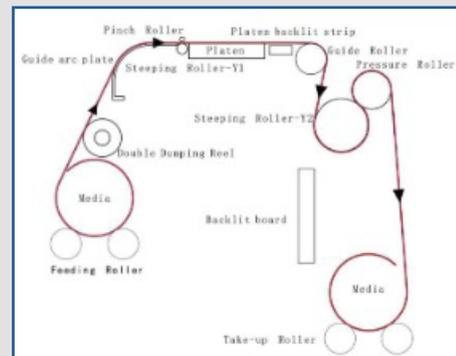

DOUBLE ROLLER FEEDING

Hapond CP-3200

UV INKJET SERIES



TECHNICAL SPECIFICATIONS

Model	CP-3200		
Dimension (L x W x H mm)	5600 x 1175 x 1730		
Max. Printing Size (mm)	3200		
Color Control System	ICC Profile		
Print Head	Max 8 Units Konica 1024A/Konica 1024i/EPSON T3200		
Printing Speed	3PASS	60sqm/hr	120sqm/hr
	4PASS	45sqm/h	90sqm/h
	6PASS	30sqm/hr	60sqm/hr
Ink Color	Optional: White		
Media Type	Backlit Flex, Car Sticker; Super Transparent, Film; Wallpaper		
Ink Type	UV ECO Ink		
RIP Software	PhotoPrint ... Optional: Caldera		
Resolution	480x1800dpi; 480x2400dpi		
Interface	USB 2.0/3.0		
Drying System	LED UV System		
Negative Pressure System	Self-development Negative Pressure Control System		
Material Handling System	Roll-To-Roll; Auto Release/Take Up		
Image Format	Bitmap; TIFF; QuarkXpress; JPEG; EPS; PDF		
Input Voltage	200V +- 10%		
Working Environment	Temperature: 20°C - 28°C		Humidity: 40%-70%RH
Weight	1800 kgs		

Technical specifications are subject to change without prior notice.



HAPOND DIGITAL TECHNOLOGY SDN. BHD. (788546-V)

+603-4296 3733
 +603-4296 9733
 sales@hapond.com.my
 hapond.com.my
 facebook.com/haponddigital

21-23 Jalan Bukit Permai Utama 3,
 Taman Industri Bukit Permai,
 56100 Cheras, Kuala Lumpur

