

INSPIRING INNOVATION



MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry


Packaging Industry

Exhibition Industry


Leather & Textile Industry




LEADSHINE BRUSHLESS DC MOTOR




AUTOMATIC FEEDING SYSTEM(OPTIONAL)



CUTTING FUNCTION



CARRIAGE BASE HEATING FUNCTION




AUTOMATIC CLEANING FUNCTION



TOUCH SCREEN TO CONTROL
PRINTER FUNCTIONS

HAPOND ECO SOLVENT PRINTER

SC1181 / SC1182

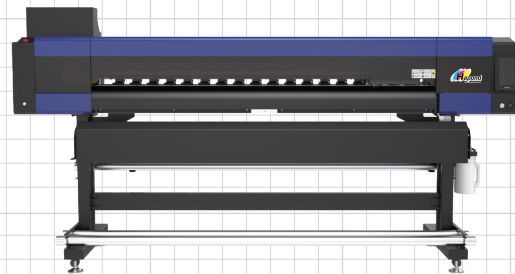

TECHNICAL SPECIFICATIONS

Model	SC1181	SC1182
Dimension (L x W x H mm)	2840x760x1480 (Printer) , 2933x1025x640 (Packing)	
Max. Printing Size (mm)	1800	
Printhead Quantity	1	2
Print Head	EPSON i3200-A1/E1	
Ink Color		
Ink Type	Water-based ink, Eco-Solvent ink	
Printhead Cleaning	Automatic cleaning, Automatic flash spray moisturizing function	
Printing Speed		
Mode	Normal Feather	Normal Feather
4PASS	17m ² /h	34m ² /h
6PASS	12m ² /h	23m ² /h
8PASS	8m ² /h	16m ² /h
Printing Media	PP, Vinyl, Flex Banner, Canvas Banner, etc.	
RIP Software	FlexiPrint (Optional: Maintop, Riin, ONYX, etc.)	
Image Format	JPG, TIF, BMP, PDF, etc.	
Standard Configuration	Heating System: External Drying System; Feeding and Take-up System: Automatic Take-up System	
Working Environment	Temperature: 15°-30° Humidity: 35°-65°	
Power Supply	50/60HZ, Input Voltage: 220V; Machine Printing Power: 1KW, Dryer: 2.4KW; Machine Printing Power: 1.2KW, Dryer: 3.8KW	
Weight	Gross Weight: 260KG Net Weight: 220KG	

Technical specifications are subject to change without prior notice.

HAPOND
DIGITAL TECHNOLOGY SDN BHD

HAPOND DIGITAL TECHNOLOGY SDN. BHD. (788546-V)

+603-4296 3733

+603-4296 9733

sales@hapond.com.my

hapond.com.my

facebook.com/haponddigital

21-23 Jalan Bukit Permai Utama 3,
Taman Industri Bukit Permai,
56100 Cheras, Kuala Lumpur

