

INSPIRING INNOVATION



MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry

Packaging Industry

Exhibition Industry

Leather & Textile Industry



POWER LEAKAGE PROTECTION UNIT



TOUCH SCREEN TO CONTROL
PRINTER FUNCTIONS



ADJUSTABLE PINCH ROLLERS



AIR SHAFT TAKE-UP & FEEDING UNIT




BULK TANK AND SUB-TANK INK SUPPLY



MUTE LINEAR GUIDE RAIL

HAPOND ECO SOLVENT PRINTER

SC1324

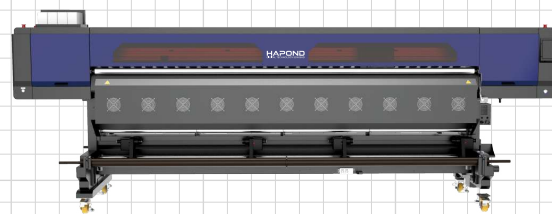

TECHNICAL SPECIFICATIONS

Model	SC1324
Dimension (LxWxH mm)	4785x1190x1729 (Printer) , 5100x1120x1270 (Packing)
Max. Printing Size (mm)	3200
Print Head Quantity	4 Units
Print Head	EPSON i3200-A1/E1
Ink Color	
Ink Type	Water-based ink, Eco-Solvent ink
Print Head Cleaning	Automatic cleaning, Automatic flash spray moisturizing function
Printing Speed	
4PASS	79
6PASS	54
8PASS	47
Printing Media	PP, Vinyl, Flex Banner, Canvas Banner, etc.
RIP Software	FlexiPrint (Optional: Maintop, Riin, ONYX, etc.)
Image Format	JPG, TIF, BMP, PDF, etc.
Standard Configuration	Heating System: External Drying System; Feeding and Take-up System: Automatic Take-up System
Working Environment	Temperature: 15°-30° Humidity: 35°-65°
Power Supply	50/60HZ, Input Voltage: 220V; Machine Printing Power: 1.5KW, Dryer: 5.6KW; Machine Printing Power: 1.5KW, Dryer: 7KW
Gross/Net Weight (kg)	990 / 890

Technical specifications are subject to change without prior notice.

HAPOND
DIGITAL TECHNOLOGY SDN BHD

HAPOND DIGITAL TECHNOLOGY SDN. BHD. (788546-V)



+603-4296 3733



+603-4296 9733



sales@hapond.com.my



hapond.com.my



facebook.com/haponddigital



21-23 Jalan Bukit Permai Utama 3,
Taman Industri Bukit Permai,
56100 Cheras, Kuala Lumpur

