


## INSPIRING INNOVATION

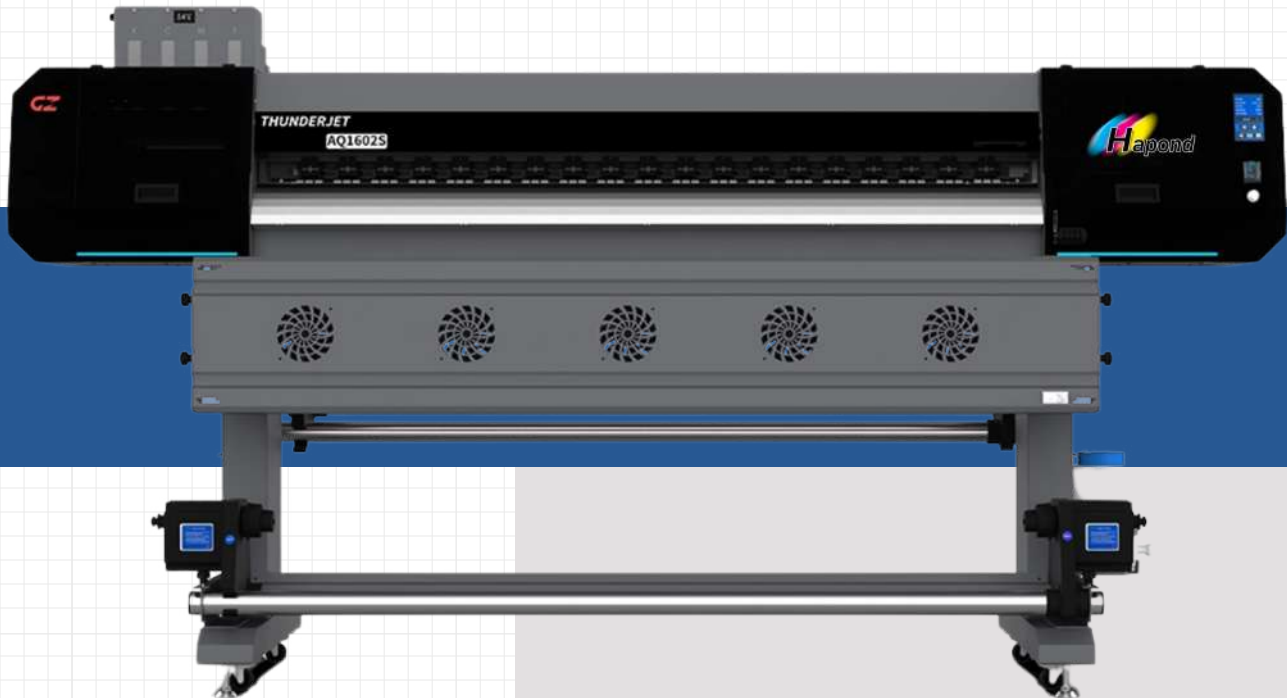

## MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry

Packaging Industry

Exhibition Industry

Leather & Textile Industry



EPSON i3200 PRINTHEAD



GZ Variable Dot  
Technology



Optimized Cleaning  
System



Precise & Adjustable  
Stepping System



Intelligent Heating Unit




High-end Configuration  
of Movement System

ECO SOLVENT SERIES

 **THUNDERJET AQ1601S/1602S**

# HAPOND ECO SOLVENT PRINTER THUNDERJET 1601S/1602S

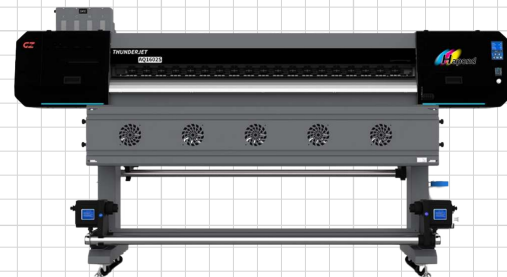

## TECHNICAL SPECIFICATIONS

| Model                    | Thunderjet AQ1601S                                              | Thunderjet AQ1602S     |
|--------------------------|-----------------------------------------------------------------|------------------------|
| Dimension (L x W x H mm) | 2760 x 810 x 1530                                               | 2790 x 870 x 1520      |
| Max. Printing Size (mm)  | 1600                                                            | 1620                   |
| Max. Media Size (mm)     | 1600                                                            | 1620                   |
| Print Head               | 1 unit EPSON i3200-E1                                           | 2 units EPSON i3200-E1 |
| Printing Speed           |                                                                 |                        |
| Production 360x1800dpi   | 17 sqm/h                                                        | 34 sqm/h               |
| High-Res 720x1200dpi     | 12 sqm/hr                                                       | 23 sqm/hr              |
| Photo 720x1800dpi        | 8 sqm/hr                                                        | 16 sqm/hr              |
| Ink Color                |                                                                 |                        |
| Media Type               | Banner, Coated PP, Vinyl, PVC Film ...                          |                        |
| Roll Weight              | max. 50 KG                                                      |                        |
| RIP Software             | FlexiPRINT / ONYX (optional).....+GZ Printer Manager            |                        |
| Resolution               | 360x1200, 360x1800, 720x1200, 720x1800 dpi                      |                        |
| Interface                | External: Ethernet; Internal: Fiber Optical                     |                        |
| Ink Supply System        | Bulk Ink Supply System with Ink Cartridges                      |                        |
| Ink Tank                 | 1500 ml                                                         |                        |
| Roll Diameter            | Max. 300mm                                                      |                        |
| Core Diameter            | 3 Inch (76.2mm) or 2 Inch (50.8mm)                              |                        |
| Input Voltage            | Single Phase, 50Hz/AC, 200V+-10%, 6.7A(Printer)+14.6A(IR Dryer) |                        |
| Working Environment      | Temperature: 20°C - 30°C                                        | Humidity: 35%-65%RH    |
| Weight                   | 190 kgs                                                         |                        |

Technical specifications are subject to change without prior notice.

**HAPOND**  
DIGITAL TECHNOLOGY SDN BHD

HAPOND DIGITAL TECHNOLOGY SDN. BHD. (788546-V)

+603-4296 3733

+603-4296 9733

sales@hapond.com.my

hapond.com.my

facebook.com/haponddigital

21-23 Jalan Bukit Permai Utama 3,  
Taman Industri Bukit Permai,  
56100 Cheras, Kuala Lumpur

