


INSPIRING INNOVATION

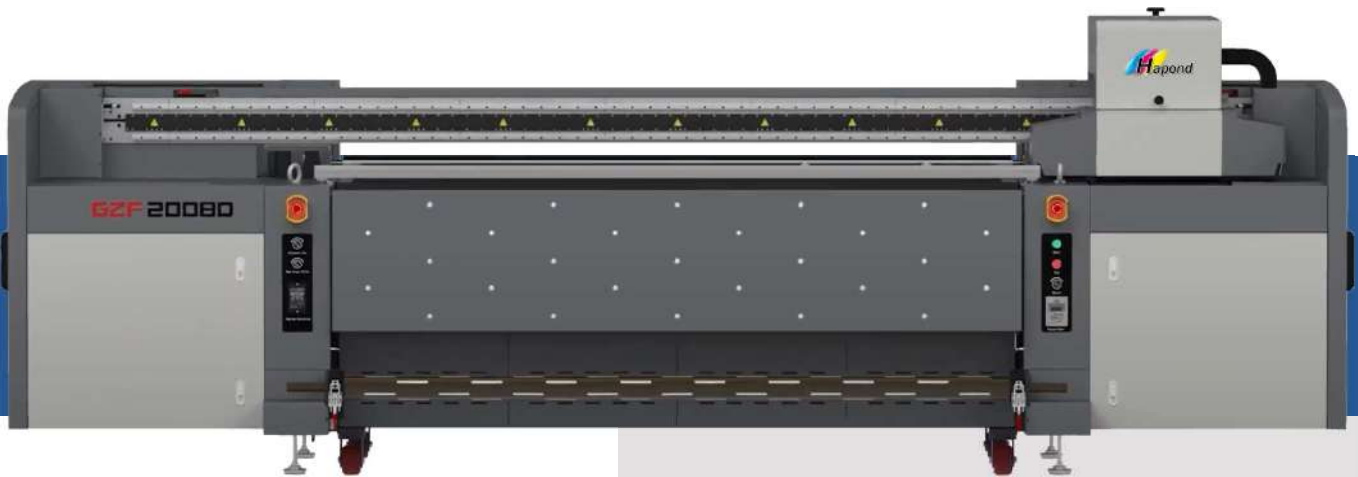

MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry

Packaging Industry

Exhibition Industry

Leather & Textile Industry

Anti friction
Rubber Roller



Superior Quality
UV LED System



High Quality
Cable Chain



JAPAN
RICOH Print Head



UV HYBRID SERIES

◀ **GZF2008D**

HAPOND UV HYBRID PRINTER GZF2008D



TECHNICAL SPECIFICATIONS

Dimension (mm)	Printer: 4050(L)x1430(W)x1460(H) + build-in-table (front&back): 2040(L)x450(W)x940(H) Optional Extension table: 2040(L) x 1200(W) x 940(H)		
Weight	Printer: 1300kg		
Print/Media Width	2000mm		
Media Thickness	70mm		
Ink Type	UV Curable Ink		
Ink Color	C M Y K Optional: Lc, Lm, Varnish		
Ink Supply System	Negative Pressure System (White Ink Stirring and Circulation System)		
Print Head	RICOH G6, Optional: RICOH G5		
No. of Print Head	3 - 8 units		
Print Resolution	600x900dpi, 600x1200dpi, 600x1800dpi		
Printing Speed	Production Mode Quality Mode High Precision Mode	2 Print Head 15 m ² /h 10 m ² /h 7 m ² /h	30 m ² /h 19 m ² /h 13 m ² /h 45 m ² /h 27 m ² /h 19 m ² /h
Print Mode	Uni- and Bi- Direction		
Media Type	Acrylic, Aluminium, Ceramic Tiles, Corrugated Board, Foam Board, Glass, Metal Plate, Back-lit, Banner Flex, Canvas, Mesh Paper, Synthetic Paper, Reflective Film, Sticker, Tarpaulin, Textile, Non-woven, Wallcoverings, etc.		
RIP & Control Software	Hapond Printer Manager, PhotoPrint, Optional: Onyx RIP, Caldera		
Curing System	LED UV System, Optional: Intergration UV System		
Cleaning System	Positive Purge each Color		
Media Handling	Roll-to-roll, Automatic Release / TakeUp		
Image Format	BMP, TIFF, JPEG, EPS, PDF, etc.		
Color Management	ICC Profile		
Data Interface	USB 2.0/3.0		
Input Voltage	Single Phase, AC220V $\pm 10\%$ (50/60Hz), 14A /Printer + UV Controller: Approx. 140		
Working Environment	Temperature : 20°C - 30°C Humidity : 40%-70% RH		

Technical specifications are subject to change without prior notice.

