

INSPIRING INNOVATION



MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry

Packaging Industry

Exhibition Industry

Leather & Textile Industry

Anti friction
Rubber Roller



Superior Quality
UV LED System



High Quality
Cable Chain



JAPAN
RICOH Print Head




UV HYBRID SERIES

◀ **GZF3208D**

HAPOND UV HYBRID PRINTER

GZF3208D

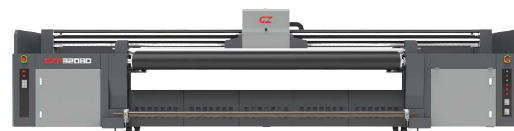

TECHNICAL SPECIFICATIONS

Model	GZF3208D Hybrid	
Dimension (LxWxH mm)	Printer: 6340 x 2000 x 1659, Extension table: 2682 x 1200 x 1093	
Weight (kg)	Printer: 1935, Extension table: 118	
Printing Width (mm)	3200	
Media Thickness (mm)	50	
Ink Type	UV Curable Ink	
Ink Color	 Optional: 	
Print Head	RICOH G5, Optional: RICOH G6	
No. Of Print Head	3-8 Units	
Printing Resolution (dpi)	600x900, 600x1200, 600x1800	
Printing Speed (m ² /h)	1xYMCK	2xYMCK
Production Mode	23	43
Quality Mode	11	21
High Precision Mode	7.5	14
Printing Mode	Uni and Bi-Direction	
Media Type	Acrylic, Aluminum, Ceramic Tiles, Corrugated Board, Foam Board, Glass, Metal Plate, Back-Lit, Banner Flex, Canvas, Mesh Paper, Synthetic Paper, Reflective Film, Sticker, Tarpaulin, Textile, Non-Woven, Wall coverings, Soft Film, etc	
RIP & Control Software	Hapond Printer Manager, Optional: Caldera, Onyx RIP	
Curing System	LED UV System	Optional: Integration UV System
Cleaning System	Positive Purge each color	
Media Handling	Roll-To-Roll, Automatic Release/Take Up	
Image Format	BMP, TIFF, JPEG, EPS, PDF, etc	
Color Management	ICC Profile	
Data Interface	USB 2.0/3.0	
Input Voltage	Single Phase, AC220V +- 10% (50/60Hz), 35A	
Working Environment	Temperature: 20°C - 30°C	Humidity: 35%-65% RH

Technical specification are subject to change without prior notice.

HAPOND
DIGITAL TECHNOLOGY SDN BHD

HAPOND DIGITAL TECHNOLOGY SDN. BHD. (788546-V)



+603-4296 3733



+603-4296 9733



sales@hapond.com.my



hapond.com.my



facebook.com/haponddigital



21-23 Jalan Bukit Permai Utama 3,
Taman Industri Bukit Permai,
56100 Cheras, Kuala Lumpur

