

INSPIRING INNOVATION



MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry


Packaging Industry

Exhibition Industry


Leather & Textile Industry

NOZZLE CONFIGURATION

Six rows/six colors

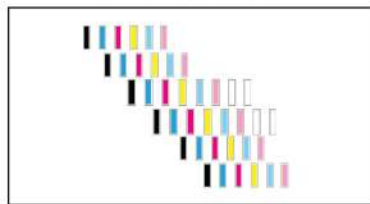

Six rows/four colors

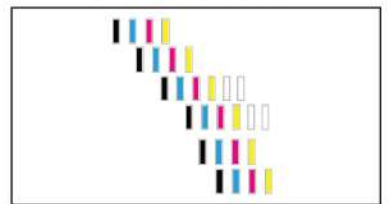

UV HYBRID SERIES

◀ **H-3200 ULTRA**

HAPOND UV HYBRID PRINTER

H-3200 ULTRA



TECHNICAL SPECIFICATIONS

Model	H-3200 Ultra Hybrid		
Dimension (LxWxH mm)	5820 x 1380 x 1690		
Weight (kg)	2300		
Printing Width (mm)	3200		
Media Width (mm)	3200		
Ink Type	UV Curable Ink		
Ink Color	 Optional: 		
Print Head	KONICA 1024A 6PL, Optional: KONICA 1024i (6pl/13pl)		
No. Of Print Head	4 – 16 Units		
Printing Resolution (dpi)	480x1080, 480x1440, 540x1080, 540x1440		
Printing Speed (m²/h)	4 Print head	8 Print head	12 Print head
Production Mode	33	66	95
Quality Mode	22	45	65
High Precision Mode	18	35	52
Printing Mode	Uni and Bi-Direction		
Media Type	Acrylic, Aluminum, Ceramic Tiles, Corrugated Board, Foam Board, Glass, Metal Plate, Back-Lit, Banner Flex, Canvas, Mesh Paper, Synthetic Paper, Reflective Film, Sticker, Tarpaulin, Textile, Non-Woven, Wall coverings, Soft Film, etc		
RIP & Control Software	Hapond Printer Manager, PhotoPrint RIP Software		Optional: Caldera,
Curing System	LED UV System	Optional: Integration UV System	
Cleaning System	Positive Purge each color		
Media Handling	Roll-To-Roll, Automatic Release/Take Up		
Image Format	BMP, TIFF, JPEG, EPS, PDF, etc		
Color Management	ICC Profile		
Data Interface	USB 2.0/3.0		
Input Voltage	Single Phase, AC220V +- 10% (50/60Hz)		
Working Environment	Temperature: 20°C – 28°C	Humidity: 40%–70% RH	

Technical specification are subject to change without prior notice.

HAPOND
DIGITAL TECHNOLOGY SDN BHD

HAPOND DIGITAL TECHNOLOGY SDN. BHD. (788546-V)



+603-4296 3733



+603-4296 9733



sales@hapond.com.my



hapond.com.my



facebook.com/haponddigital



21-23 Jalan Bukit Permai Utama 3,
Taman Industri Bukit Permai,
56100 Cheras, Kuala Lumpur

