


INSPIRING INNOVATION

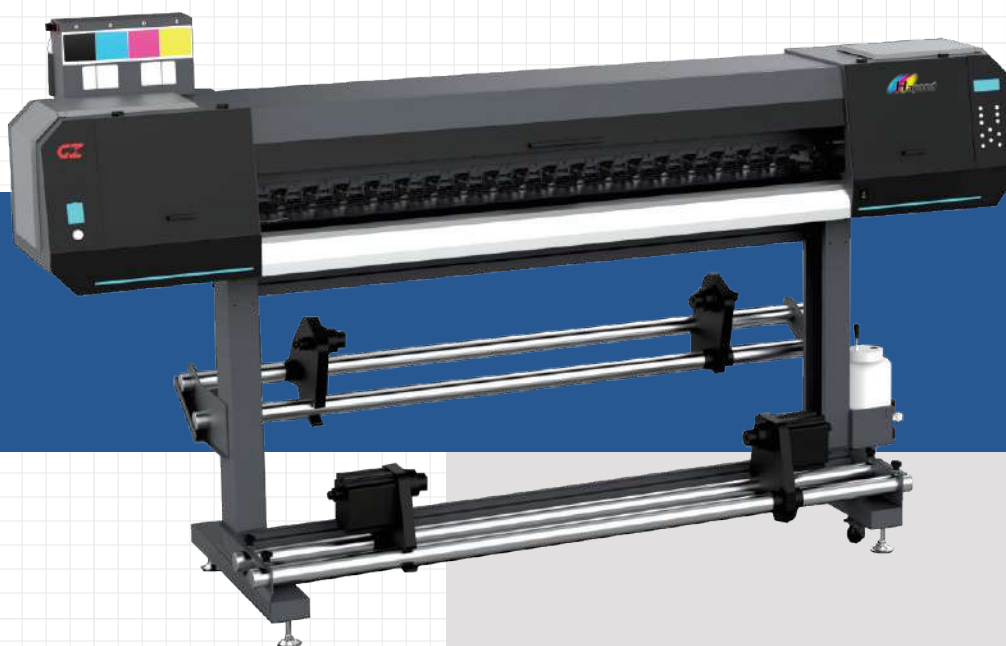

MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry

Packaging Industry

Exhibition Industry

Leather & Textile Industry

Adjustable Stepping System




Intelligent Heating Unit



Water Cooling Platen



White Ink Recirculation System



UV ROLL-TO-ROLL SERIES

 **THUNDERJET AQ1602/AQ1802 UV**

HAPOND UV ROLL-TO-TOLL PRINTER THUNDERJET AQ1602/AQ1802 UV



TECHNICAL SPECIFICATIONS

Model	ThunderJet AQ 1602 UV / AQ1802UV			
Print Head	1~2 EPSON i3200 U1 print heads			
Technology	Drop-On-De Variable Dot			
Curing System	Dual Water Cooling LED UV lamps			
Ink	Flexible UV Ink			
Color Configuration				
Ink Supply System	Bulk ink supply system + White ink Recirculation System			
Ink Tank	1000ml			
Print Width	Max. 1600mm / 1800mm			
Media Type	Banner, Coated PP, Vinly, Backlit Textile, PVC Film, Pet Film...			
Roll Diameter	Max. 300mm			
Roll Weight	Max. 50kgs			
Core Diameter	3'(76.2mm) or 2'(50.8mm)			
Printing Speed	Mode	Resolution(dpi)	1xKCYM	2xKCYM
	Production	720x1200	9.5m ² /hr	18m ² /hr
	High Resolution	720x1800	7.0m ² /hr	14m ² /hr
	Photo	720x1800	6.0m ² /hr	12m ² /hr
Data Interface	External: Ehternet; Internet: Fibre Optical			
Working Environment	Temp. 23~29, Humidity: 50%~80%			
Software	FlexiPrint / ONXY(Optional)...+GZ Printer Manager			
Power	Single Phase, 50Hz/AC, 220V+10%, 5A(Printer+UV Controller)			
Installed Size	LxWxH(mm): 2783 x 767 x 1558 / 3126 x 924 x 1396			
G.W / N.W	290kg/ 190kg 384kg/ 280kg			

Technical specifications are subject to change without prior notice.

